



# K 250




**ELECTRICAL COLD WATER HIGH-PRESSURE CLEANERS**  
*IDROPULITRICI ELETTRICHE AD ACQUA FREDDA*


**DUAL USE**  
*DOPPIO USO*



**1 CAN BE USED VERTICALLY**  
*UTILIZZABILE IN VERTICALE*

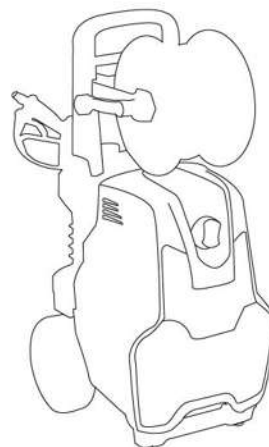

**2 CAN BE USED HORIZONTALLY**  
*UTILIZZABILE IN ORIZZONTALE*

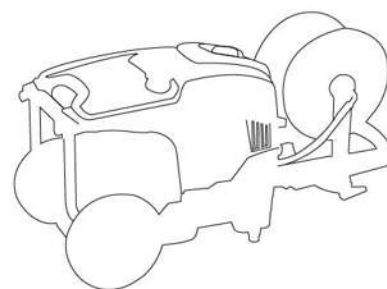

## GENERAL FEATURES

- Sturdy injection-moulded plastic casing
- Handy lance and gun storage
- Handle with supports for the power cable and delivery hose
- **Easy maintenance by simply removing the front casing**
- Big wheels (220 mm Ø) for easy movement up and down steps and over uneven ground
- Removable detergent tank with level that can be seen externally
- Detergent adjustment with filter
- Regulated low-pressure detergent suction
- Pressure gauge
- 4-pole motor (1400 rpm) well oversized and protected with paint
- Integrated professional pressure unloader valve
- **TotalStop**
- Self-priming pumps with **EASY-START** device on single-phase models
- Rotary switch
- Motor thermal cut-out



## CARATTERISTICHE GENERALI

- **Robuste carenature in materiale plastico stampato ad iniezione**
- **Pratico alloggiamento della pistola e della lancia**
- **Manico con supporti di cavo alimentazione e tubo mandata**
- **Facilità di manutenzione con la semplice rimozione della carenatura frontale**
- **Ruote di grandi dimensioni (Ø220mm) per una facile movimentazione su gradini e terreni accidentati**
- **Serbatoio detergente estraibile con livello visibile esternamente**
- **Regolazione detergente con filtro**
- **Aspirazione detergente in bassa pressione con regolazione**
- **Manometro di pressione**
- **Motore a 4 poli (1400 giri/min) ampiamente sovradimensionato e protetto da verniciatura**
- **Valvola di regolazione pressione professionale integrata**
- **TotalStop**
- **Pompe autoadescanti dispositivo EASY-START modelli monof.**
- **Interruttore rotativo**
- **Protezione termica motore**
- **Uso professionale**

- COMET LW-K type pump with 3 integral ceramic pistons. Oil sight glass. Brass pump heads.
- Pompa COMET tipo LW-K 3 pistoni in ceramica integrale. Visore livello olio Testate in ottone.

- Works vertically and horizontally.
- Funzionamento sia in verticale che in orizzontale.



USES > UTILIZZI



CODE CODICE	MODEL MODELLO											
		Ph	V	Hz	bar	MPa	l/h	CV	kW	l	kg	(L x W x H) cm
9057 0002	K 250 10/150 M Classic	1	230	50	150	15,0	600	2,7	2,7	3,5	37	52 x 43 x 93
9057 0004	K 250 12/130 M Classic	1	230	50	130	13,0	720	2,8	2,8	3,5	37	52 x 43 x 93
9057 0006	K 250 11/160 M Classic *	1	230	50	160	16,0	660	3,3	3,3	3,5	37	52 x 43 x 93
9057 0008	K 250 13/190 T Classic	3	400	50	190	19,0	780	5,0	5,2	3,5	37	52 x 43 x 93
9057 0010	K 250 15/170 T Classic	3	400	50	170	17,0	900	5,0	5,2	3,5	37	52 x 43 x 93
9057 0012	K 250 11/210 T Classic	3	400	50	210	21,0	660	5,0	5,2	3,5	37	52 x 43 x 93
9057 0001	K 250 10/150 M Extra	1	230	50	150	15,0	600	2,7	2,7	3,5	44	52 x 43 x 93
9057 0003	K 250 12/130 M Extra	1	230	50	130	13,0	720	2,8	2,8	3,5	44	52 x 43 x 93
9057 0005	K 250 11/160 M Extra *	1	230	50	160	16,0	660	3,3	3,3	3,5	44	52 x 43 x 93
9057 0007	K 250 13/190 T Extra	3	400	50	190	19,0	780	5,0	5,2	3,5	44	52 x 43 x 93
9057 0009	K 250 15/170 T Extra	3	400	50	170	17,0	900	5,0	5,2	3,5	44	52 x 43 x 93
9057 0011	K 250 11/210 T Extra	3	400	50	210	21,0	660	5,0	5,2	3,5	44	52 x 43 x 93

\* requires 4 kW electricity supply - richiede rete elettrica da 4 kW



STANDARD EQUIPMENT > DOTAZIONE STANDARD



Ergonomic gun  
(for Classic models only)  
Pistola ergonomica  
(solo per modelli Classic)



Gun with swivel  
(for Extra models only)  
Pistola con swivel  
(solo per modelli Extra)



Lance with adjustable jet  
Lancia con getto regolabile



High-pressure rubber hose  
(15 m for Extra models only)  
(10 m for Classic models only)  
Tubo gomma alta pressione  
(15 m solo per modelli Extra)  
(10 m solo per modelli Classic)