



**E**QUIPAGGIAMENTI  
**T**ECNICI  
**L**AVAGGIO

**25.1527.12**

LS 3 + Attacco baionetta "K" - lancia schiuma con serbatoio  
LS 3 + "K" Bayonet coupling - foam lance with tank




**2**

12/09/07

**CARATTERISTICHE TECNICHE - SPECIFICATIONS**

- PRESSIONE NOMINALE RATED PRESSURE	160 bar - 16 MPa (2300 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	180 bar - 18 MPa (2600 psi)
- PORTATA MASSIMA MAX FLOW RATE	20 l/min (5.2 USG p.m.)
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	60° C (140° F)
- UGELLO NOZZLE	ø 1.25 (0.0492")
- CAPACITA' SERBATOIO TANK VOLUME	Litri 1 (0.264 USG)

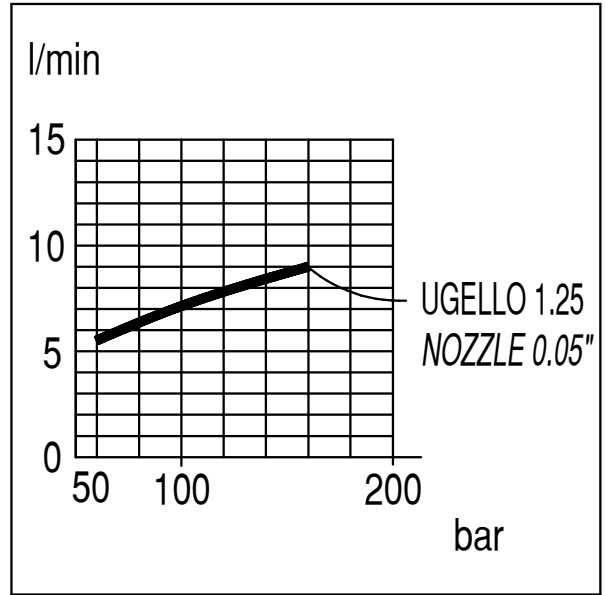

**MISURE D'INGOMBRO - OVERALL DIMENSIONS**

